




The markers are used to write on a variety of surfaces:

steel, rubber, wood, plastic, glass, stone and more.





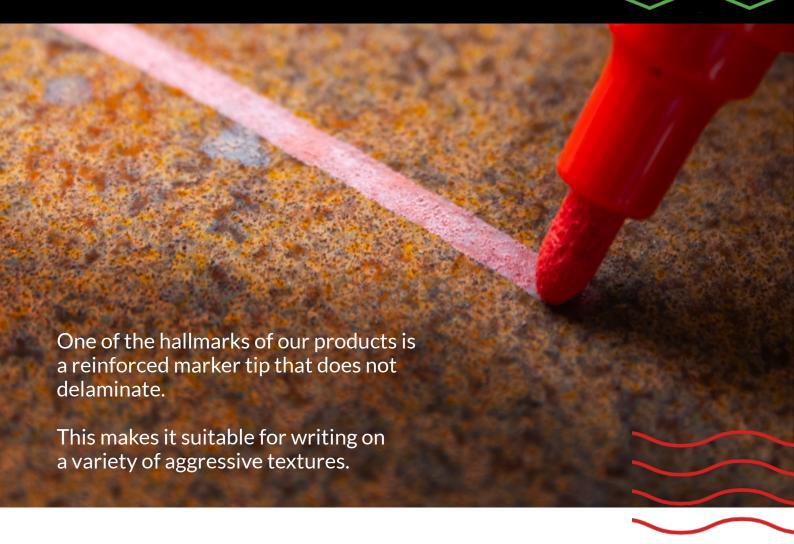

The writing thickness is 2.5-3.0 mm.



The marker contains an ink pump valve - valve system.





Quick-drying ink, intense colours, clearly visible.

An aluminium housing resistant to mechanical damage.









Method of use:

Shake the closed marker before each use. At the first time, pump by pressing until the ink runs down the entire tip. Use in ventilated rooms. Close after each use. Xylene-free. Keep away from children.



